




Datascan 7010 Measurement Processor

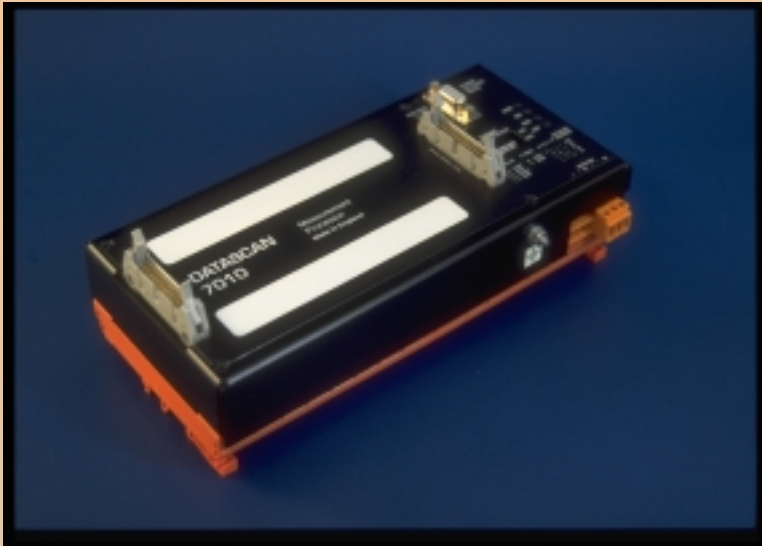

Main Features

- 16 bit measurement performance with upto 0.625uV Sensitivity
- On board non-volatile memory for storing unit configurations
- Local Monitoring Facility
- 38.4 kBaud data transfer
- Comprehensive range of built in software commands
- 500V Isolation from Network
- High and low speed data acquisition
- Compact DIN Rail Mounting

General Description

The Datascan 7010 Measurement Processor module allows connection for a host computer or local display device to a Datascan 7000 Network at any point and provides the measurement facilities for connected scanner modules.

On board each 7010 is a programmable high performance ADC, a serial interface for connection to the host computer, a network interface permitting upto 32 further Measurement Processors (e.g. 7010,72xx or 73xx series) or 7011 Network Interface modules to be connected and an expansion bus for Datascan 7000 Scanner Modules.

The local expansion bus provides the method by which analog and digital scanner modules can be connected. Upto 256 channels can be added to each 7010 expansion port upto a distance of 10m.

Alternatively, the 7010 can be connected to the real time Datascan 7000 Network by means of the isolated RS485 Network Port. This token passing network can extend over a distance of 1.2km (4000ft) and support a total channel capacity of 1000 channels of various types. The network bandwidth permits an update rate of 1000 channels/sec. Since all of the measured data is always available at any point, the 7010 allows any subset of the measured data to be read in real-time. The network supports dual token operation which enables one set of channels to be scanned at a higher frequency than a second set, thus providing a facility for mixing high and low speed measurement.



7010 Technical Specification

Measurement Speed (Individual channel speed selection)	
16 Bit	40 rdgs/sec
14 Bit	400 rdgs/sec
RS232 Interface	
Baud rates selectable are	4800, 9600, 19200, 38400
Isolation	500Vdc
Max Distance (direct)	10m to host
Recommended Cable Types	
Belden 9207	upto 1.2km
Belden 8761	upto 300m
Network	
Electrical Specification	RS485
Transmission	93.75 kBaud
Data Rate	1000 results/sec
Total Channels per Network	1000
Max. No. of nodes (Processors)	32
Max. Network Length	1.2km (4000ft)
Isolation	500Vdc
Expansion Bus	
Total Channels per 7010	256 Analog or Digital
Max Cable Length	10m
Power Requirements	
24V AC or DC @ 500 mA	Battery backup life : 5 Years unpowered

Host Access

Host Computer access to the 7010 is through the isolated RS232 Port with a switch selectable baud rate from 4800 to 38k4 Baud.

The 7010 allows the user to configure and re-configure any channels using any of the 50 built-in Datascan Software commands. These allow the definition of labels, alarms, scaling, resolution, units and mathematical functions on a per channel basis.

As a low cost alternative to a computer, a standard terminal may be connected to the RS232 Port for use in any configuration. In addition up to 10 titled display pages may be defined with any mix of 16 channels on each page. This provides a local monitoring facility for installation, servicing or permanent display.

Dimensions	Width	Depth	Height	Weight
	230mm	80mm	123mm	700g
Enviromental				
Operating Temperature Range		-10 C to +60 C		
Storage Temperature Range		-20 C to +80 C		
Relative Humidity		90% Non Condensing		

PARTNERSHIP COURTYARD, RAMPARTS ROAD, DUNDALK, IRELAND TEL: +353 42 9332399 SALES@MEASURESOFTE.COM	13380 SOUTH GESSNER, MISSOURI CITY, TX 77489, USA TEL: +1 281 969 7529 WWW.MEASURESOFTE.COM	
--	---	--